

HOLSAG CANADA

Seating Manufacturer

Specifications: Bulldog Armchair

Description

The name “Bulldog” represents the sturdy nature of this seating line that includes a side chair, armchair, barstool and matching benches. The side rails are extra thick to support the weight of people climbing up and leaning onto the chair next to them. The back slats are raised from the seat to allow for easy cleaning. Upholstered seats as well as solid wood seats are available. The wood seats are sculpted at the factory to ensure a comfortable sitting position.

Dimensions: Armchair

Height	35”	89 cm
Depth	19”	48 cm
Seat Width	18”	46 cm
Seat Depth	16.5”	42 cm
Seat Height	18”	46 cm
Arms Height	26.5	67 cm
Arms Outside	21.5”	54 cm
Arms Inside	19”	48 cm
Chair Weight	20 lbs	9 kg
Carton Weight		
with 1 chair	30 lbs	13.6 kg
Carton Size		
	18.25” x 24.5” x 37.5”	
	46 cm x 62 cm x 95 cm	
Volume	9.7 cubic feet	

The Bulldog armchair is non-stacking.

Fabric for upholstered seats

COM (Customer’s Own Material) fabric required:
.35 yd (.33 m)

Note: This is the estimated amount based on 54” (137 cm) wide material. The actual amount required may vary depending on special pattern matching and the width of the material.

Stock fabric: Black vinyl is available as a stock fabric.

Cushion Foam: High density 1.5” (3.8 cm) thick on seat

Wood

Species: 100% Solid European Beech Hardwood

Construction

Joints: Mortise and tenon.
Glued with high solids glue and reinforced with 18 gauge nails, corner blocks and low root woodscrews.


Stain Colors

A wide range of standard stain colors is available as well as custom color matching. (A surcharge will apply to custom colors.)

9-Step Finishing Process

1. The bare wood of the assembled chair is thoroughly sanded using 120 grit paper.
2. One coat of stain is sprayed onto the entire chair – including the underside of the seat.
3. The stain is handwiped to ensure an even color and maximum penetration into the wood.
4. The chair is inspected and any necessary adjustments made.
5. One coat of a catalyzed sealer is sprayed onto all wood parts to completely seal the wood – including the underside of the seat.
6. Once dry, the sealer is sanded using 320 grit paper.

7. A final sanding is done using Scotch Brite pads to remove any sanding marks.
8. A catalyzed lacquer is sprayed on. This lacquer is very durable and will stand up in a commercial environment.
9. A final inspection is performed prior to packaging to ensure a high level of quality control.

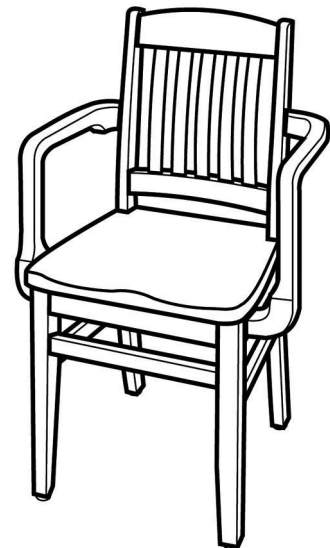

Note: Specifications are subject to change without notice.

Holsag Canada

164 Needham Street
Lindsay, Ontario Canada
K9V 5R7
(705) 878-1970
(888) 745-0721 (U.S. & Canada)
Fax: (705) 878-1864

www.holsag.com

HOLSAG CANADA

Seating Manufacturer

Specifications: Bulldog Benches

Dimensions: 42" (106 cm) Bench

Height	35"	89 cm
Depth	17"	43 cm
Frame Width	42"	107cm
Seat Depth	16"	40 cm
Seat Height	18"	46 cm
Arms Height	28"	71 cm
Arms Outside	48"	122 cm
Weight	40 lbs	18 kg
Weight (with arms)	42 lbs	19 kg
Carton Size	21.25" x 49.25" x 36"	
	53.5 cm x 124 cm x 91 cm	

Dimensions: 60" (152 cm) Bench

Height	35"	89 cm
Depth	17"	43 cm
Frame Width	60"	152 cm
Seat Depth	16"	40 cm
Seat Height	18"	46 cm
Arms Height	28"	71 cm
Arms Outside	66"	168 cm
Weight	60 lbs	27 kg
Weight (with arms)	62 lbs	28 kg
Carton Size	21.25" x 64.5" x 36"	
	53.5 cm x 162.5 cm x 91 cm	

Wood

Species: 100% Solid European Beech Hardwood

Construction



Joints: Mortise and tenon.
Glued with high solids glue and reinforced with 18 gauge nails, corner blocks and low root woodscrews.

Stain Colors

A wide range of standard stain colors is available as well as custom color matching. (A surcharge will apply to custom colors.)

9-Step Finishing Process

1. The bare wood of the assembled bench is thoroughly sanded using 120 grit paper.
2. One coat of stain is sprayed onto the entire bench – including the underside of the seat.
3. The stain is handwiped to ensure an even color and maximum penetration into the wood.
4. The bench is inspected and any necessary adjustments made.
5. One coat of catalyzed sealer is sprayed onto all wood parts to completely seal the wood – including the underside of the seat.
6. Once dry, the sealer is sanded using 320 grit paper.
7. A final sanding is done using Scotch Brite pads to remove any sanding marks.
8. A catalyzed lacquer is sprayed on. This lacquer is very durable and will stand up in a commercial environment.
9. A final inspection is performed prior to packaging to ensure a high level of quality control.

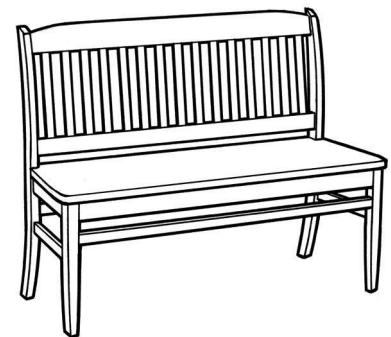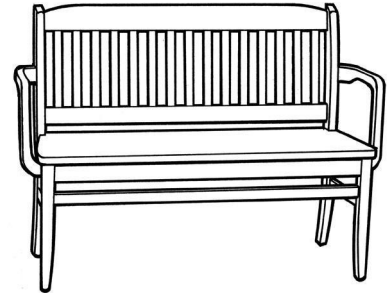

Note: Specifications are subject to change without notice.

Holsag Canada

164 Needham Street
Lindsay, Ontario Canada
K9V 5R7

(705) 878-1970

(888) 745-0721 (U.S. & Canada)

Fax: (705) 878-1864

www.holsag.com

HOLSAG CANADA

Seating Manufacturer

Specifications: Bulldog Backless Barstool

Description

The simple styling of the Backless Barstool provides comfortable seating while tucking neatly under bar areas. The side rails are extra thick to support the weight of people climbing up and leaning onto the barstool next to them. Upholstered seats as well as solid wood seats are available. The wood seats are sculpted at the factory to ensure a comfortable sitting position.

Dimensions

Height	30"	76 cm
Depth	19"	48 cm
Seat Width	18"	46 cm
Seat Depth	18"	46 cm
Weight	20 lbs	9 kg
Carton Weight		
with 1 stool	30 lbs	14 kg
Carton Size		
18.25" x 24.5" x 37.5 "		
46 cm x 62 cm x 95 cm		

Fabric for upholstered seats

COM (Customer's Own Material) fabric required:
.35 yd (.33 m)

Note: This is the estimated amount based on 54" (137 cm) wide material. The actual amount required may vary depending on special pattern matching and the width of the material.

Stock fabric: Black vinyl is available as a stock fabric.

Cushion Foam: 2.2 lb, high density 1.5" (3.8 cm) thick on seat

Wood

Species: 100% Solid European Beech Hardwood

Construction

Joints: Mortise and tenon.
Glued with high solids glue and reinforced with 18 gauge nails, corner blocks and low root woodscrews.


Stain Colors

A wide range of standard stain colors is available as well as custom color matching. (A surcharge will apply to custom colors.)

9-Step Finishing Process

1. The bare wood of the assembled chair is thoroughly sanded using 120 grit paper.
2. One coat of stain is sprayed onto the entire chair – including the underside of the seat.
3. The stain is handwiped to ensure an even color and maximum penetration into the wood.
4. The chair is inspected and any necessary adjustments made.
5. One coat of a catalyzed sealer is sprayed onto all wood parts to completely seal the wood – including the underside of the seat.

6. Once dry, the sealer is sanded using 320 grit paper.
7. A final sanding is done using Scotch Brite pads to remove any sanding marks.
8. A catalyzed lacquer is sprayed on. This lacquer is very durable and will stand up in a commercial environment.
9. A final inspection is performed prior to packaging to ensure a high level of quality control.

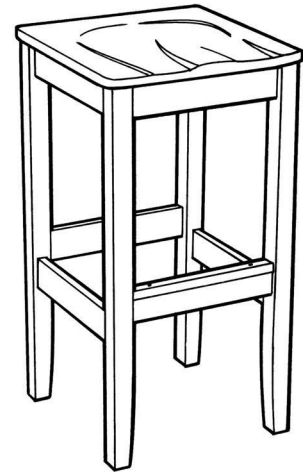

Note: Specifications are subject to change without notice.

Holsag Canada

164 Needham Street
Lindsay, Ontario Canada
K9V 5R7
(705) 878-1970
(888) 745-0721 (U.S. & Canada)
Fax: (705) 878-1864

www.holsag.com

HOLSAG CANADA

Seating Manufacturer

Specifications: Bulldog Chair and Barstool

Description

The name "Bulldog" represents the sturdy nature of this seating line that includes a side chair, armchair, barstool, backless barstool and matching benches. The side rails are extra thick to support the weight of people climbing up and leaning onto the chair next to them. The back slats are raised from the seat to allow for easy cleaning. Upholstered seats as well as solid wood seats are available. The wood seats are sculpted at the factory to ensure a comfortable sitting position.

Dimensions: Chair

Height	35"	89 cm
Depth	19"	48 cm
Seat Width	18"	46 cm
Seat Depth	16.5"	42 cm
Seat Height	18"	46 cm
Chair Weight	17.5 lbs	8 kg
Carton Weight		
with 1 chair	28 lbs	13 kg
with 2 chairs	45 lbs	21 kg
Carton Size for 1 Chair		
	18.25" x 22.25" x 37.5"	
	46 cm x 56 cm x 95 cm	
Carton Volume for 1 Chair		
	8.8 cubic feet	
Carton Size for 2 Chairs		
	18.25" x 24.5" x 37.5"	
	46 cm x 62 cm x 95 cm	
Carton Volume for 2 Chairs		
	9.7 cubic feet	
<i>Note: Packing of chairs is based on the shipping method.</i>		

The Bulldog chair is non-stacking.

Dimensions: Barstool

Height	47"	119 cm
Depth	19"	48 cm
Seat Width	18"	46 cm
Seat Depth	16.5"	42 cm
Seat Height	30"	76 cm
Stool Weight	24 lbs	11 kg

Carton Weight		
with 1 stool	34 lbs	15.5 kg
Carton Size for 1 Barstool		
	18.5" x 20" x 48"	
	46.3 cm x 50.8 cm x 121.8 cm	
Volume	10.3 cubic feet	

Note: The barstool is available in custom seat heights ranging from 24" (61 cm) to 30" (76 cm).

Standard kickplates are brass. Chrome kickplates are available upon request at the same price.

Fabric for upholstered seats

COM (Customer's Own Material) fabric required (chair and barstool): .35 yd (.33 m)

Note: This is the estimated amount based on 54" (137 cm) wide material. The actual amount required may vary depending on special pattern matching and the width of the material.

Stock fabric: Black vinyl is available as a stock fabric.

Cushion Foam: High density 1.5" (3.8 cm) thick on seat

Wood

Species: 100% Solid European Beech Hardwood

Construction


Joints: Mortise and tenon. Glued with high solids glue and reinforced with 18 gauge nails, corner blocks and low root woodscrews.

Stain Colors

A wide range of standard stain colors is available as well as custom color matching. (A surcharge will apply to custom colors.)

9-Step Finishing Process

1. The bare wood of the assembled chair is thoroughly sanded using 120 grit paper.
2. One coat of stain is sprayed onto the entire chair – including the underside of the seat.
3. The stain is handwiped to ensure an even color and maximum penetration into the wood.
4. The chair is inspected and any necessary adjustments made.
5. One coat of a catalyzed sealer is sprayed onto all wood parts to completely seal the wood – including the underside of the seat.
6. Once dry, the sealer is sanded using 320 grit paper.
7. A final sanding is done using Scotch Brite pads to remove any sanding marks.
8. A catalyzed lacquer is sprayed on. This lacquer is very durable and will stand up in a commercial environment.
9. A final inspection is performed prior to packaging to ensure a high level of quality control.

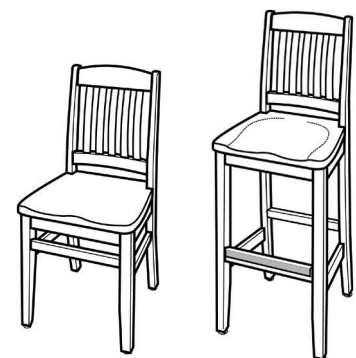

Note: Specifications are subject to change without notice.

Holsag Canada

164 Needham Street
Lindsay, Ontario Canada
K9V 5R7

(705) 878-1970

(888) 745-0721 (U.S. & Canada)

Fax: (705) 878-1864

www.holsag.com