

HOLSAG CANADA

Seating Manufacturer

Specifications: Henry Chair and Barstool

Description

The Henry chair and barstool are styled to the classic “Library” design. Details such as the elegant, slightly fanned back with six slats and decorative brackets on the edge of the seat give this chair a timeless design. Upholstered seats as well as solid wood seats are available. The wood seats are sculpted at the factory to ensure a comfortable sitting position.

Dimensions: Chair

Height	34.5	88 cm
Depth	21”	53 cm
Seat Width	18”	46 cm
Seat Depth	16.5”	42 cm
Seat Height	18”	46 cm
Chair Weight	17 lbs	7.75 kg
Carton Weight		
with 1 chair	28 lbs	13 kg
with 2 chairs	44 lbs	20 kg
Carton Size for 1 Chair		
	18.25” x 22.25” x 37.5”	
	46 cm x 56 cm x 95 cm	
Carton Volume for 1 Chair		
	8.8 cubic feet	
Carton Size for 2 Chairs		
	18.25” x 24.5” x 37.5”	
	46 cm x 62 cm x 95 cm	
Carton Volume for 2 Chairs		
	9.7 cubic feet	
<i>Note: Packing of chairs is based on the shipping method.</i>		

Dimensions: Barstool

Height	43.5”	111 cm
Depth	19.75”	50 cm
Seat Width	18”	46 cm
Seat Depth	16.5”	42 cm
Seat Height	30”	76 cm
Stool Weight	21 lbs	9.5 kg
Carton Weight		
with 1 stool	31 lbs	14 kg

Carton Size	
	19.25” x 20.25” x 45”
	48.9 cm x 51 cm x 113.4 cm
Volume	10.2 cubic feet

Note: The barstool is available in custom seat heights ranging from 24” (61 cm) to 30” (76 cm).

Standard kickplates are brass. Chrome kickplates are available at the same price.

Fabric for upholstered seats

COM (Customer’s Own Material) fabric required (chair and barstool): .35 yd (.33 m)

Note: This is the estimated amount based on 54” (137 cm) wide material. The actual amount required may vary depending on special pattern matching and the width of the material.

Stock fabric: Black vinyl is available as a stock fabric.

Cushion Foam: High density 1.5” (3.8 cm) thick on seat

Wood

Species: 100% Solid European Beech Hardwood

Construction


Joints: Mortise and tenon. Glued with high solids glue and reinforced with 18 gauge nails, corner blocks and low root woodscrews.

Stain Colors

A wide range of standard stain colors is available as well as custom color matching. (A surcharge will apply to custom colors.)

9-Step Finishing Process

1. The bare wood of the assembled chair is thoroughly sanded using 120 grit paper.
2. One coat of stain is sprayed onto the entire chair – including the underside of the seat.
3. The stain is handwiped to ensure an even color and maximum penetration into the wood.
4. The chair is inspected and any necessary adjustments made.
5. One coat of a catalyzed sealer is sprayed onto all wood parts to completely seal the wood – including the underside of the seat.
6. Once dry, the sealer is sanded using 320 grit paper.
7. A final sanding is done using Scotch Brite pads to remove any sanding marks.
8. A catalyzed lacquer is sprayed on. This lacquer is very durable and will stand up in a commercial environment.
9. A final inspection is performed prior to packaging to ensure a high level of quality control.

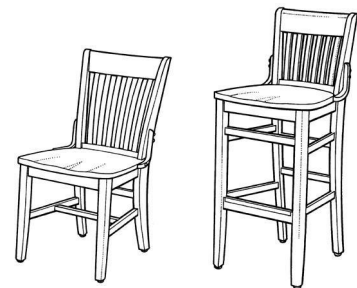

Note: Specifications are subject to change without notice.

Holsag Canada

164 Needham Street
Lindsay, Ontario Canada
K9V 5R7

(705) 878-1970

(888) 745-0721 (U.S. & Canada)

Fax: (705) 878-1864

www.holsag.com