


CEILING
MINIMUM CLEARANCE FROM COMBUSTIBLES MUST BE MAINTAINED (see chart on opposite page)

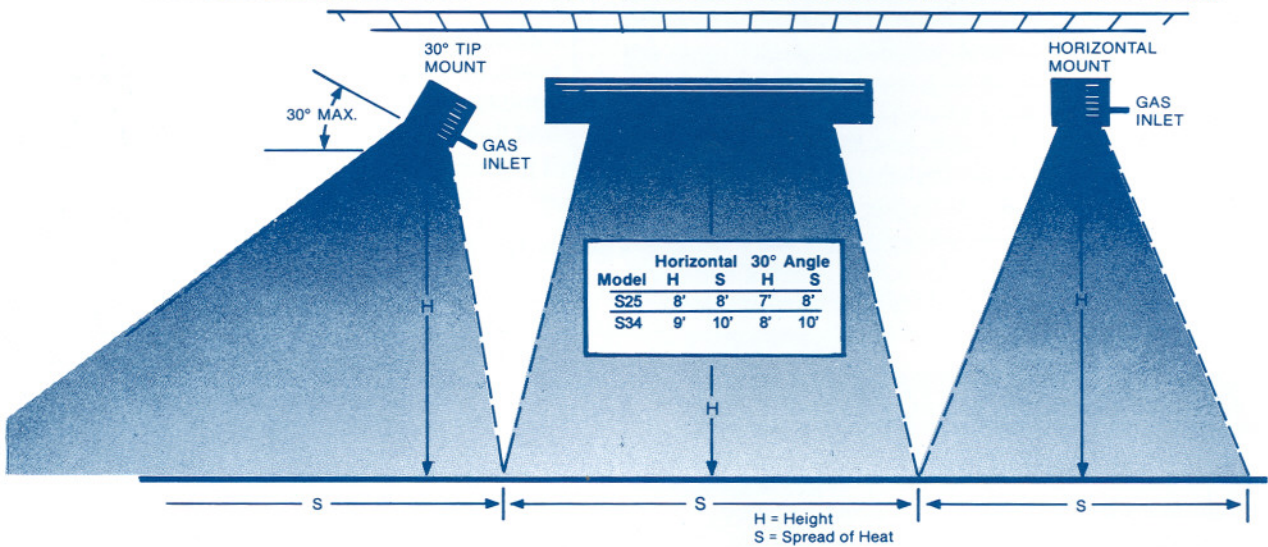

SUNPAK will raise the comfort level 5-10° Fahrenheit outdoors. The above coverage table was based on still breeze conditions. Under windy conditions more heat will be required. It is recommended that a windswept patio be designed with wind breaks to stabilize the patio environment. Wind breaks shall NOT interfere with the ventilation of combustion air requirement of the heater(s).

ANGLE MOUNTING: Most models of the SUNPAK heater may be angle-mounted to a maximum of 30° to accommodate mounting the heaters around the edges of the patio. Note that the top clearance to combustibles increase when heater is tipped from the horizontal.

NOTE: Local codes may have special requirement regarding head clearance requirements. Some local codes require all portions of overhead radiant heaters to be located at least 8 foot above the floor.