



# SPACESAVER ADJUSTABLE STOOL

## Model No. SSAS – Assembly Instructions


### PARTS LIST

Qty.	Description
2	Double Leg Sections
1	13" Cushion Seat
4	Height Adjuster Extensions
4	Black Rubber Feet
1	1" Bolt and Lock Washer Nut
1	Small Flat Lock Washer for Center Screw
4	1 3/4" Oval Head Machine Screw and Acorn Nut
4	#12 Self-Tapping Machine Screws
1	17 1/2" Diameter Foot Ring

Tools Required: Philips Head Screwdriver

**IMPORTANT:** Only hand tighten bolts and nuts while assembling stool. Fully tighten only when legs have been secured to under side of seat.

Fig. 1

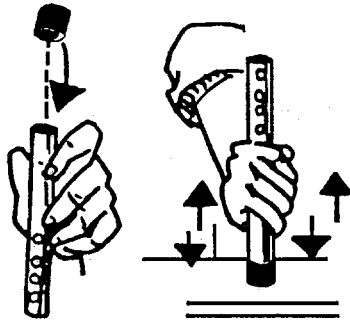


Prepare height adjuster extensions by setting black rubber feet onto extension end opposite four pairs of adjuster holes. Tap feet firmly into place. Repeat for all extensions.

Fig. 2




Insert height adjuster extensions into each leg section. Choose desired seat height and make note of appropriate height adjusting holes. Hole closest to rubber foot sets 24" height -- each hole adds 2" height.

Fig. 3

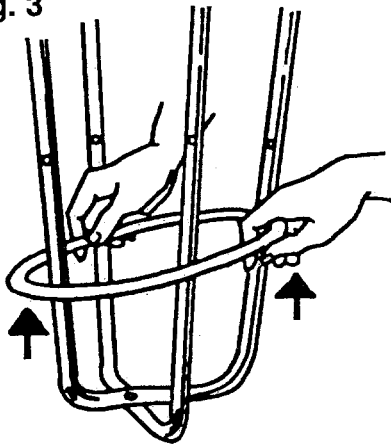

Slip ring over leg assembly and secure to leg sections and height adjuster extensions by lining up all holes with one another, and slipping a 1 3/4" oval head machine screw through all of them, ring first. Hand tighten acorn nut onto end of screw. Repeat for all sets of ring, leg section and height adjuster extension holes.

Fig. 4

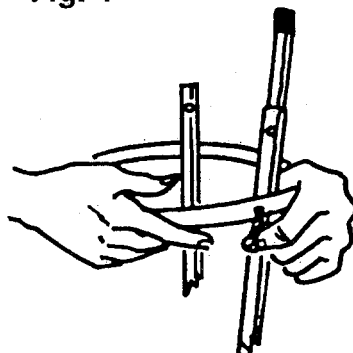

Place seat upside down on soft (non-abrasive) surface with underside facing up. Turn leg assembly upside down and put in center screw with lock washer. Then screw in #12 self-tapping sheet metal screws. Now go back and tighten all screws, bolts and nuts.

Fig. 5

