



Model 119/119TNF


Assembly Instructions

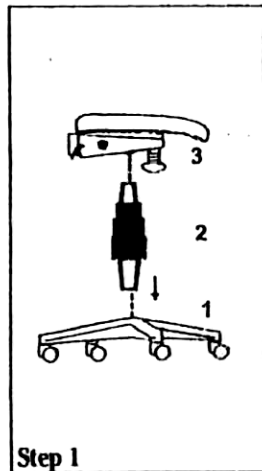


Step 1
Insert the Gas Lift into the Base. Place the Seat and Mechanism firmly on top of the Gas Lift. Sit firmly and heavily on the chair at least three times to tighten the connecting joints.

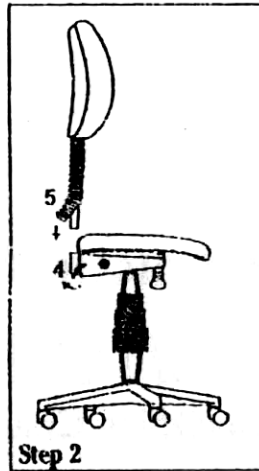

Step 2
Pull the bottom bellow lower, hold the back solid bar in place, push down into the steel square on the mechanism, then re-set the bottom bellow in right position

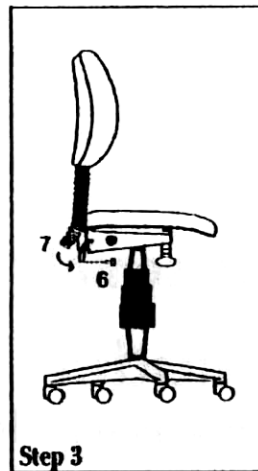

Step 3
Pull up the back solid bar at desired height, then tight it up with attached screw big holder on the mechanism



※ 250 LBS WEIGHT CAPACITY ※

CAUTION: 1. Do not use this chair as a step ladder .
2. Check for loose screws and tighten them every 6 months.

CONTENTS :

<u>Parts</u>	<u>Qty</u>	<u>Parts</u>	<u>Qty</u>
Backrest w/solid bar	1	Caster	5
Seat	1	Nylon Base	1
Heavy mechanism	1	Screw M6×25mm	4
Gaslift w/cover	1	Washers(M6)	4

OPERATING INSTRUCTIONS:

Before starting, please read instructions carefully.

To Lower Seat:

Lift lever B while seated; release lever when desired height is reached.
Do NOT push down on lever.

To Raise Seat:

Lift lever B while taking weight off the chair; release lever when desired heights is reached. Do NOT push down on lever.

To Adjust Back Angle:

While seated, lift lever A; lean backward or forward until your desired back angle position is reached, release lever. To "free float" the back, push lever A all the way down until it locks; release from "free float" to lock position by returning lever A to its normal position.

To Raise or Lower Back Support:

While seated, turn control handle C one-quarter turn backward and raise or lower the back support until the desired position is reached, release the control handle.