



HIGH PERFORMANCE STROLLERS



Performance Single

The Ultimate High Performance Jogging Stroller

Assembly Instructions

*Important, Keep For
Future Reference*

For the sake of your precious cargo, please read these warnings before using your Baby Jogger.

- Important, keep this booklet for future reference.
- Accessories which are not approved by the manufacturer or distributor should not be used.
- **WARNING:** Prevent serious injury to your child by always using the safety harness.
- **WARNING:** Any load attached to the handle affects the stability of the stroller.
- **WARNING:** It may be dangerous to leave child unattended.
- Always use your wrist strap – these strollers can really roll, and the wrist strap gives you control if you should slip or fall down.
- The passenger should remain seated (no standing in the stroller).
- Watch out for cars – never assume that a driver can see you and your child.
- Never use Roller Blades while using a Baby Jogger Stroller.
- Intended for passengers up to five years of age weighing no more than 100 pounds.
- This Jogger seats one passenger.
- **WARNING:** Recommended weight for seat pocket is 2 pounds and basket is 10 pounds. Excessive weight may cause a hazardous unstable condition to exist.
- It may be unsafe to use replacement parts other than those supplied or approved by the manufacturer.

Frame



- To assemble, simply unfold frame and insert the front of handle assembly into Front Tube Connector and lock together, securing with Snap Locks.


Footplate



1 Insert the footplate tab into the footplate holder slot



2 Snap down onto Jogger frame.

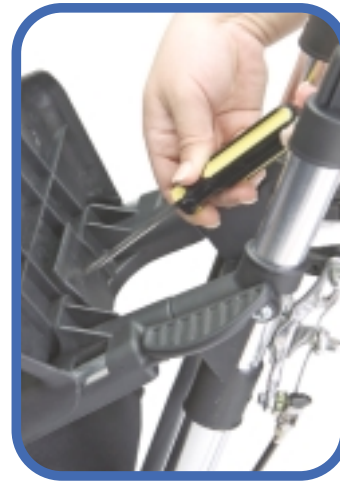

3 Using a phillips head screwdriver, attach footplate to Jogger frame. You will need to rest the Jogger Handle on the floor in order to get to the bottom of the footplate.

2

Front Wheel

1 To install front wheel, lay stroller back so handle is resting on floor. Open the calipers by flipping the caliper lever toward the rear wheels while pinching calipers together.

2 Insert the front wheel into the fork tips by aligning the axle flats with the fork tip flats.

3 Tighten by turning the wheel lever while holding the opposite side.

4 Close the wheel lever making sure that it is facing toward the back of the stroller.

5 Close caliper by flipping the caliper lever toward the fork tips.



3

Rear Wheels



- To install, gently slide the wheel's axle into the hole in the axle end until you hear it click into place.



- To remove, simply push in the spring lock while pulling out the wheel.

Reclining Seat






- Simply adjust seat straps to desired degree of recline.



- Pull on strap when you want to return the seat to its upright position.

Be sure to remove the board from the back of the seat before washing.

Safety Harness

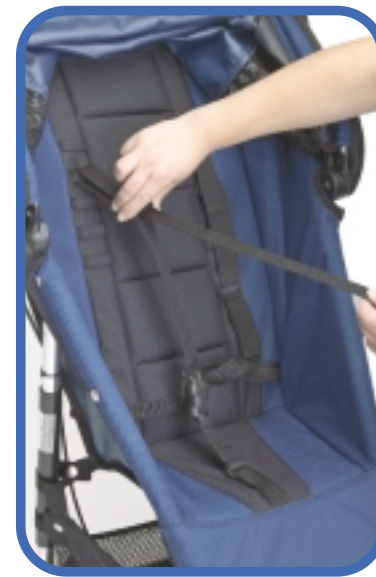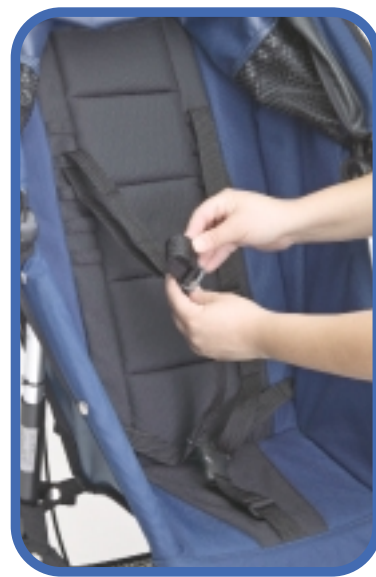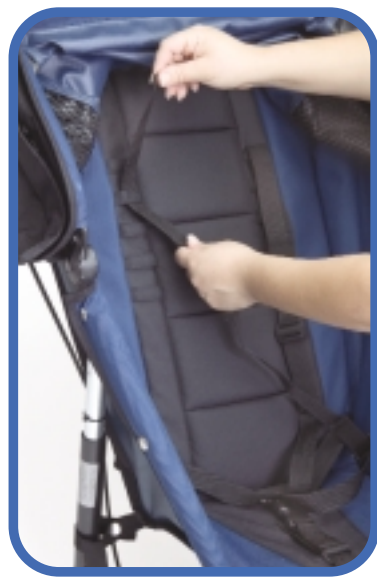

Adjusting safety harness:

- Loosen the shoulder straps from their plastic guides.
- Slide the end of each strap through pair of seat loops closest to your child's shoulder.

- Slide the end of the shoulder strap back into plastic guide. Please note: If you feel the straps are too tight, you may adjust their length by sliding the plastic guides toward the top of the seat.
- Lock both sides of the strap mechanism into the center buckle. To adjust the center strap, move its plastic guide up or down.




WARNING: Avoid serious injury from falling or sliding out. Always use safety harness!

Brakes


Hand Brake with Parking Button

- To use the parking button feature, simply squeeze the brake handle and push the park brake button.

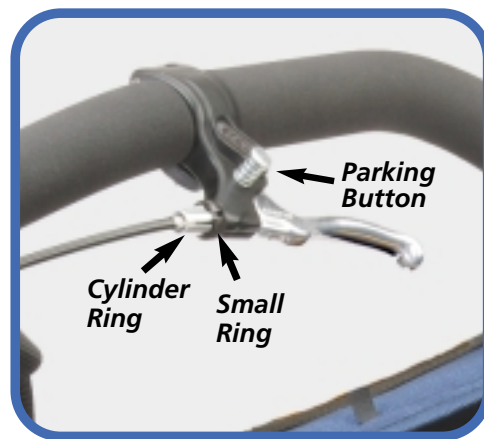

Adjusting the Brake

- If you don't have good braking action, simply squeeze the brake handle five or six times. If the problem persists, loosen the brake's cylinder ring to adjust the small ring, and then move the small ring away from the handle to tighten the cable. (Please do not over tighten!) To lock the rings, tighten the cylinder ring against the handle while holding the small ring in place.

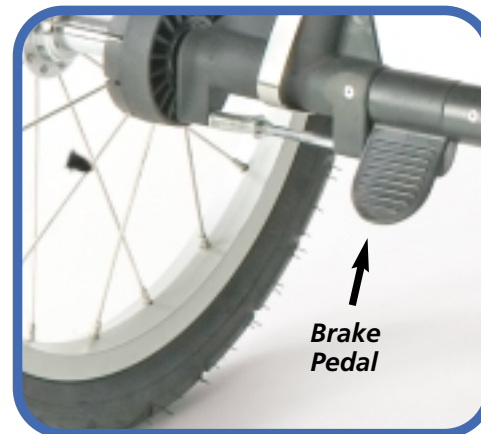

Rear Wheel Parking Brakes

- Simply push brake pedal down to engage brake and lift up to release.

Canopy

Image shown with seat fabric removed for clearer viewing.

NOTE: Some Joggers are shipped with the Canopy, Seat and Basket pre-assembled. Assembly instructions are given if any pre-assemble items are removed for cleaning or replacement.



1 Using a phillips head screwdriver, screw brackets to Jogger frame.



2 Fasten upper velcro straps



3 Snap to Jogger frame.


Seat



1 Snap eight frame snaps to frame.



2 Fasten the two bottom velcro straps. One is located near the front of seat and the other is near the footplate.

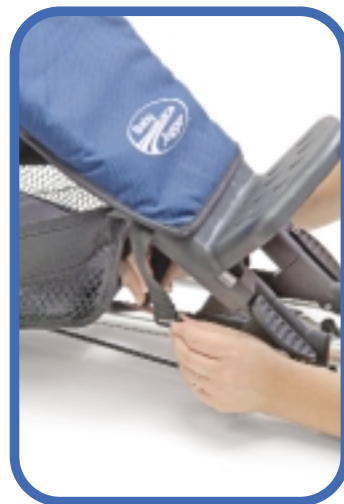

Basket

- Basket installation or removal requires releasing the bottom section of seat as shown on previous page to reveal velcro strap.



• Fasten front velcro strap.



- Snap rear basket straps around frame.

In Motion

Steering

- Steering your stroller is simple: it's balanced to turn with just a light touch on the handlebar. For tighter turns, push down on the handlebar and raise the front wheel to steer.

Wrist Strap

- Make sure wrist strap is around your wrist whenever your baby is in the stroller. The Baby Jogger is lightweight and ready to roll – with or without you – and the wrist strap helps you gain control over your stroller.

In the Dark

- Since we are concerned about the safety of you and your baby, we recommend that you not use your stroller at night. However, if you choose to, please attach reflective strips to the wheel spokes and the seat. Bicycle lights can also be mounted on the handlebar.



Stroller Care

Washing

- You can machine wash your stroller's seat in cold water with a mild detergent. To minimize shrinkage, simply reattach the seat to the frame to dry. (Please do not put the seat in the dryer!)
- Be sure to remove the board from the back of the seat before washing.
- You may clean the stroller frame using a soft, dry cloth, and an occasional spray of household wax will maintain its healthy glow.



Wheel Care

- Moisture – especially from the beach – can rust the wheel bearing case. Spraying regularly with a silicone lubricant will keep your wheels looking healthy.
- Also, if you jog massive amounts of miles, your stroller will benefit from a yearly visit to the bike shop for wheel alignment. Refer to the number on the tire wall for the optimum pressure for your tires.

Storing

- Sunshine can fade seat fabric and dry out tires, so storing your stroller indoors will prolong its good looks. However, if you do store it outside, using a tarp will protect against weather wear.

Thank You!

We wish you many happy journeys with your new Baby Jogger! Your stroller is a great product, and we are proud to manufacture it. If you have any questions or comments, please give us a call at.

1.800.241.1848



H I G H P E R F O R M A N C E S T R O L L E R S

Baby Jogger is a Division of Dynamic Brands

2042 Westmoreland Street • Richmond, VA 23230
T: 800.241.1848 • F: 804.262.6277
www.babyjogger.com